



Right DDC

[SPECIFICATIONS +](#)
[SOFTWARE & DOCUMENTATION +](#)

Specifications

Supply voltage	24VAC/DC, 50Hz
Power consumption	5W for the base module
Temperature*	Storage (-40 °C to +85 °C) / Operating (-20°C to +70 °C)
Humidity	Max. 95% RH non-condensing
IP Class	IP2x (Without enclosure)
Programming/ Configuration	Remotely/ locally programmable (with inbuild software)
Firmware Updates	Over the air/ local
Serial Ports	Upto two RS485; upto 10 ports with extensions
TCP Ports	Upto two TCP (10Base-T/100Base), Optional Gigabit
USB Ports	Upto two USB 3.0 ports
Protocols Supported#	DNP3.0/ Modbus/ MBUS/ Bacnet
Processor	1GHz ARM processor (Optional High efficiency PRU)
Memory	4GB/ 8GB eMMC extendable
RAM	512MB/ 1GB
Security	ISO27001 Compliant with optionally enabled certifications
Communication	Supports TLS1.2
Input Output Units#	Supports upto 128 high speeds Input/ Output units



* Higher temperature ranges are available as special product


Higher IO unit capacity is available as special product


\$ Email connect@rightwatts.com to enquire about other protocols

Software & documentation





Product sheet

 Right DDC

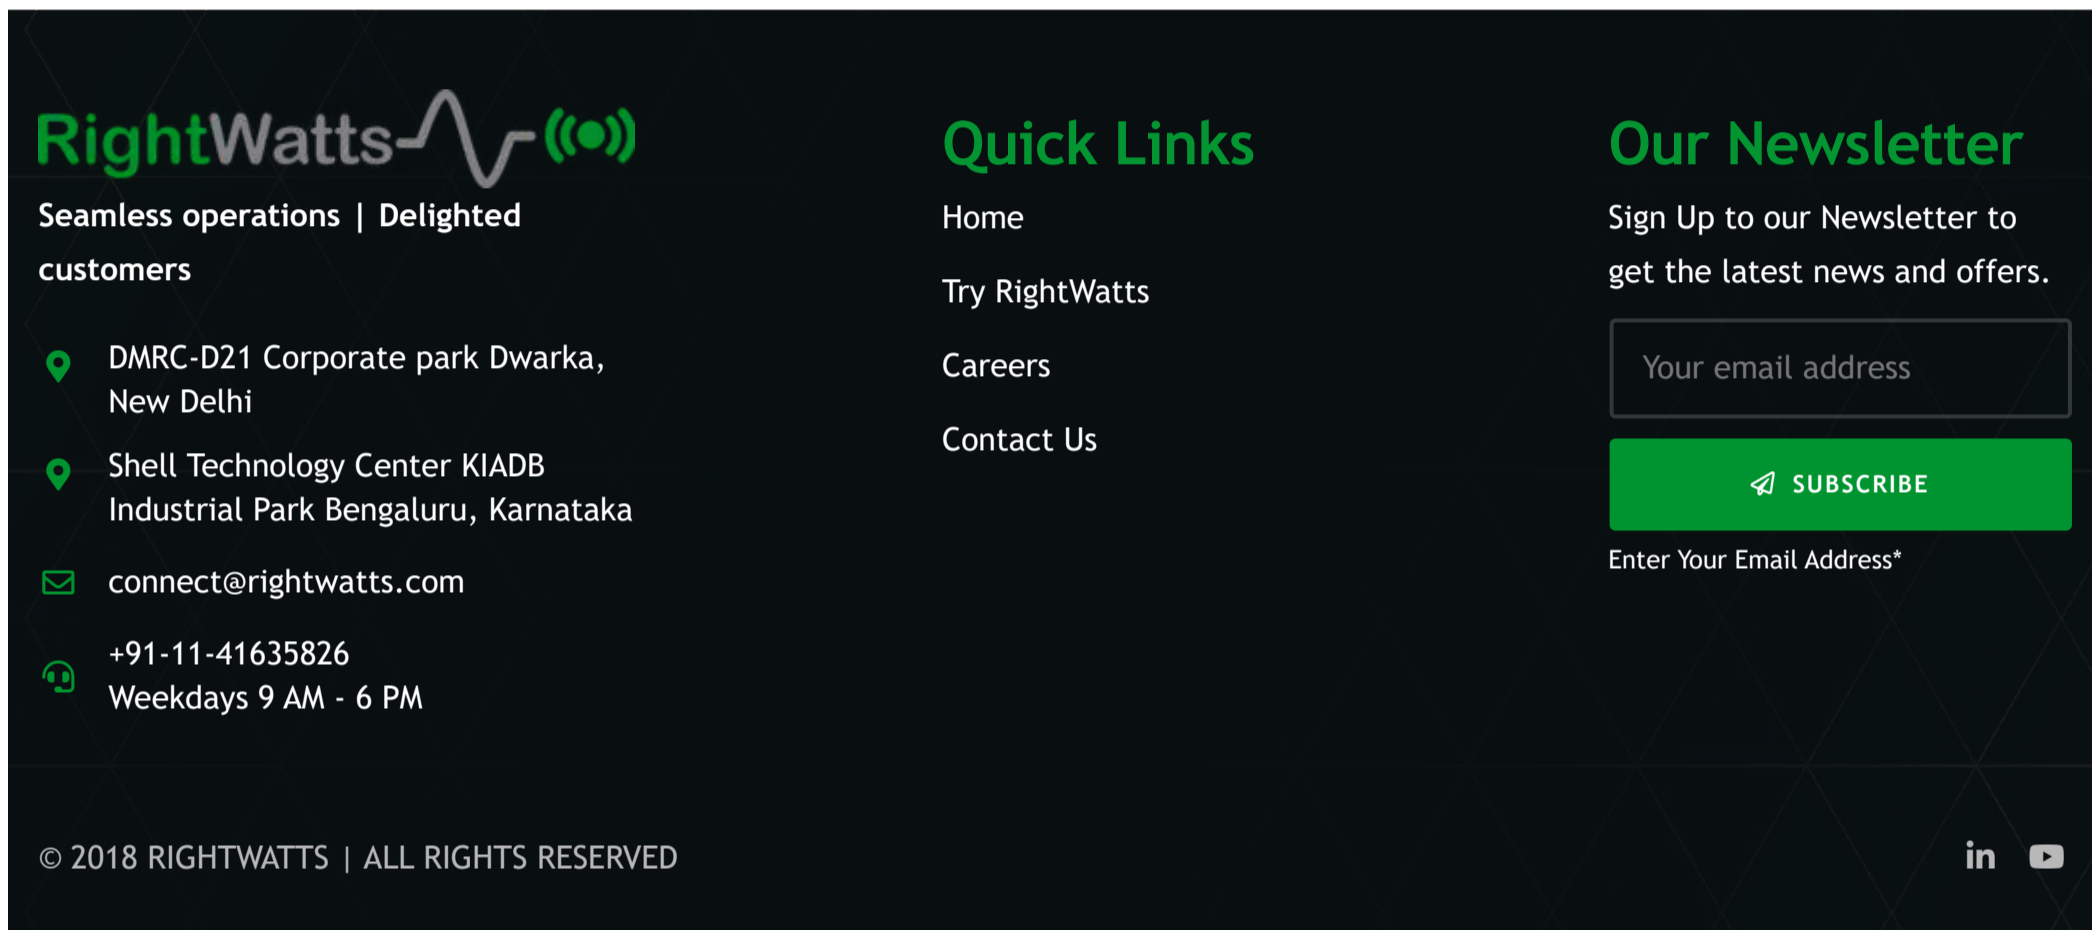

RightWatts 

Seamless operations | Delighted customers


-  DMRC-D21 Corporate park Dwarka, New Delhi
-  Shell Technology Center KIADB Industrial Park Bengaluru, Karnataka
-  connect@rightwatts.com
-  +91-11-41635826
Weekdays 9 AM - 6 PM

Quick Links

- Home
- Try RightWatts
- Careers
- Contact Us

Our Newsletter

Sign Up to our Newsletter to get the latest news and offers.

 SUBSCRIBE

Enter Your Email Address*

© 2018 RIGHTWATTS | ALL RIGHTS RESERVED

